


MODEL NUMBER:

- ☐ T018900 Roman Tub Filler Trim LESS Personal Shower
- ☐ T018901 Roman Tub Filler Trim WITH Personal Shower

For use with Flash™ rough valves

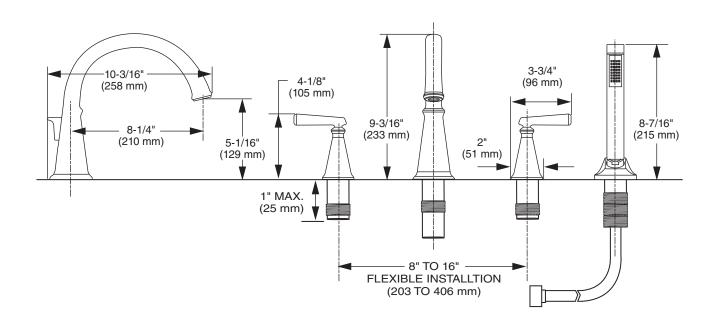

GENERAL DESCRIPTION:

Installs with Flash rough valve platform. Washerless 1/4 turn ceramic disc valve cartridges. Durable brass spout. Metal lever handles. Trim kit provides an additional 1" installation adjustability for finished deck.

PRODUCT FEATURES:

Brass Construction: Durable. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

SUGGESTED SPECIFICATION

Two handle deck-mount tub filler shall feature cast brass construction. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # T01890_.___.

© 2018 AS America Inc. (8/18)




Edgemere® Roman Tub Filler Trim


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B125.1

Check local plumbing codes. Some installations may require a vacuum breaker.





TUB SPOUT FLOW


HAND SHOWER FLOW

| | | | Finish Options | | |
|-------------------|---|--------------|--------------------|-------------------|------------------|
| | | | Polished Chrome | Brushed Nickel | Legacy Bronze |
| Product Number | Description | | 002 | 295 | 278 |
| T018900 | Roman Tub Filler Trim LESS Personal Shower. | (<u>B</u>) | | | |
| T018901 | Roman Tub Filler Trim WITH Personal Shower. | CEO ADA | | | |

ÁD4

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

- □ R900 Flash[™] Roman Tub Filler
 Rough Body Less Personal Shower
- □ R910 Flash Roman Tub Filler
 Rough Body WITH Personal Shower

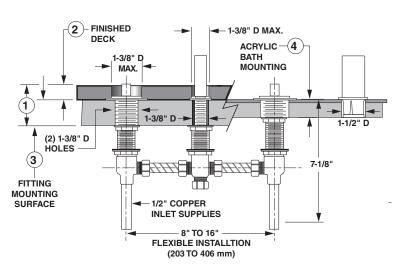

- 1. DECK THICKNESS TOTAL DECK THICKNESS UP TO 2-1/2"
- 2. FINISHED DECK FINISHED DECK VARIABILITY ACCOMMODATES DECKING MATERIAL (TILE, MARBLE, CORIAN®...) TO 1" THICK
- 3. FITTING MOUNTING SURFACE ADJUSTABILITY, TO 1-1/2" THICK
- 4. ACRYLIC BATHS
 ADJUSTABILITY, TO 1-1/2" THICK
- 1" D (2) 1-3/8" D HOLES

 8" TO 16" FLEXIBLE INSTALLTION
 (203 TO 406 mm)
 DECK MOUNTING HOLES

PART OF LIXIL