



# REM<sup>®</sup>

## SINGLE LEVER LAVATORY AND VESSEL FAUCETS



- European minimalist design
- Cast brass spout and body
- Joystick multiport ceramic disc valve cartridge
- 5-3/4" spout
- Speed Connect<sup>®</sup> with 1-1/4" drain
- Lead Free—faucet contains  $\leq 0.25\%$  total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

### CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/  
CSA B125.1/NSF 61/Section 9

EPA WaterSense<sup>®</sup> High Efficiency  
Lavatory Faucet Specification

Certified Compliant with 0.25% Weighted  
Average Lead Content Regulations

### AVAILABLE FINISHES

Polished Chrome  
Brushed Nickel

### FINISH CODE

100  
144

### DESCRIPTION

1.5 gpm (5.7 L/min)  
Single Lever Lavatory Faucet  
Single Lever Vessel Faucet  
1.2 gpm (4.5 L/min)  
Single Lever Lavatory Faucet  
Single Lever Vessel Faucet

### PRODUCT NUMBER

D35100100.XXX  
D35100150.XXX  
  
D3510010C.XXX  
D3510015C.XXX



ROUGH-IN DIAGRAM  
SHOWN ON NEXT PAGE




Meets the Americans with Disabilities Act  
Guidelines and ANSI A117.1 Requirements  
for the physically challenged.



# REM<sup>®</sup>

## SINGLE LEVER LAVATORY AND VESSEL FAUCETS

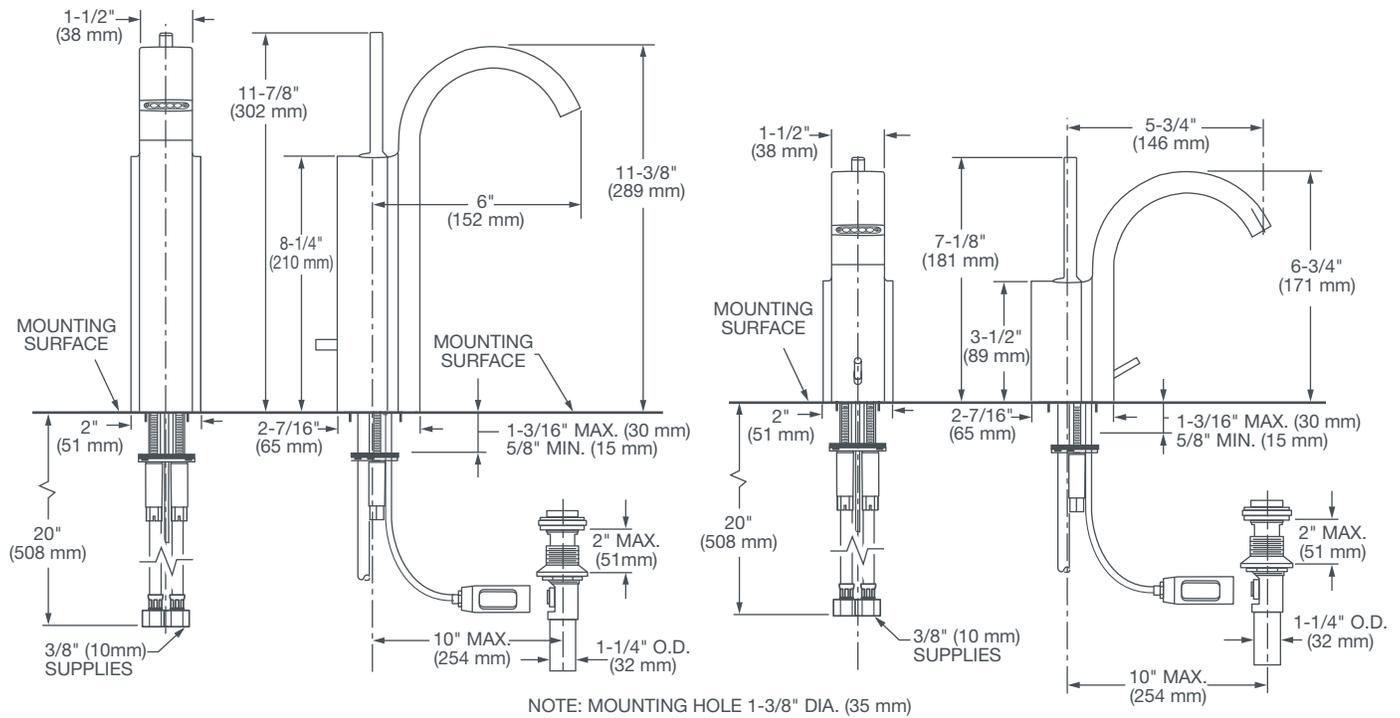

**IMPORTANT:** These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL