




Buy it for looks. Buy it for life.®

# Specifications

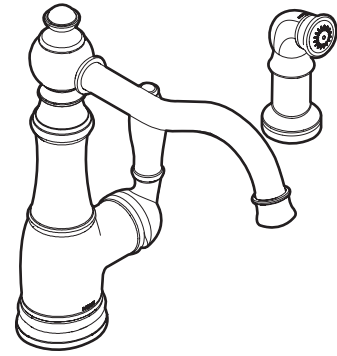

## WEYMOUTH™ Single Handle Single Hole Mount High Arc Kitchen Faucet

Models: S72101 series with spray

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 OR 2 HOLES: A 1-1/2" (38MM) MIN. DIA. HOLE FOR VALVE AND A 1-1/4" (32MM) MIN. DIA. HOLE FOR SIDE SPRAY.



### FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes matching side spray with Duralock quick connect system
- Single hole mounting
- Flexible supply lines with 3/8" compression fittings
- 360° rotating spout

### OPERATION

- Single handle lever
- Temperature controlled by 100° arc of handle travel
- Faucet may be installed with or without side spray

### FLOW

- Spout flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

### CARTRIDGE


- 1255™ Duralast™ cartridge for Single-Handle Faucets

### STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

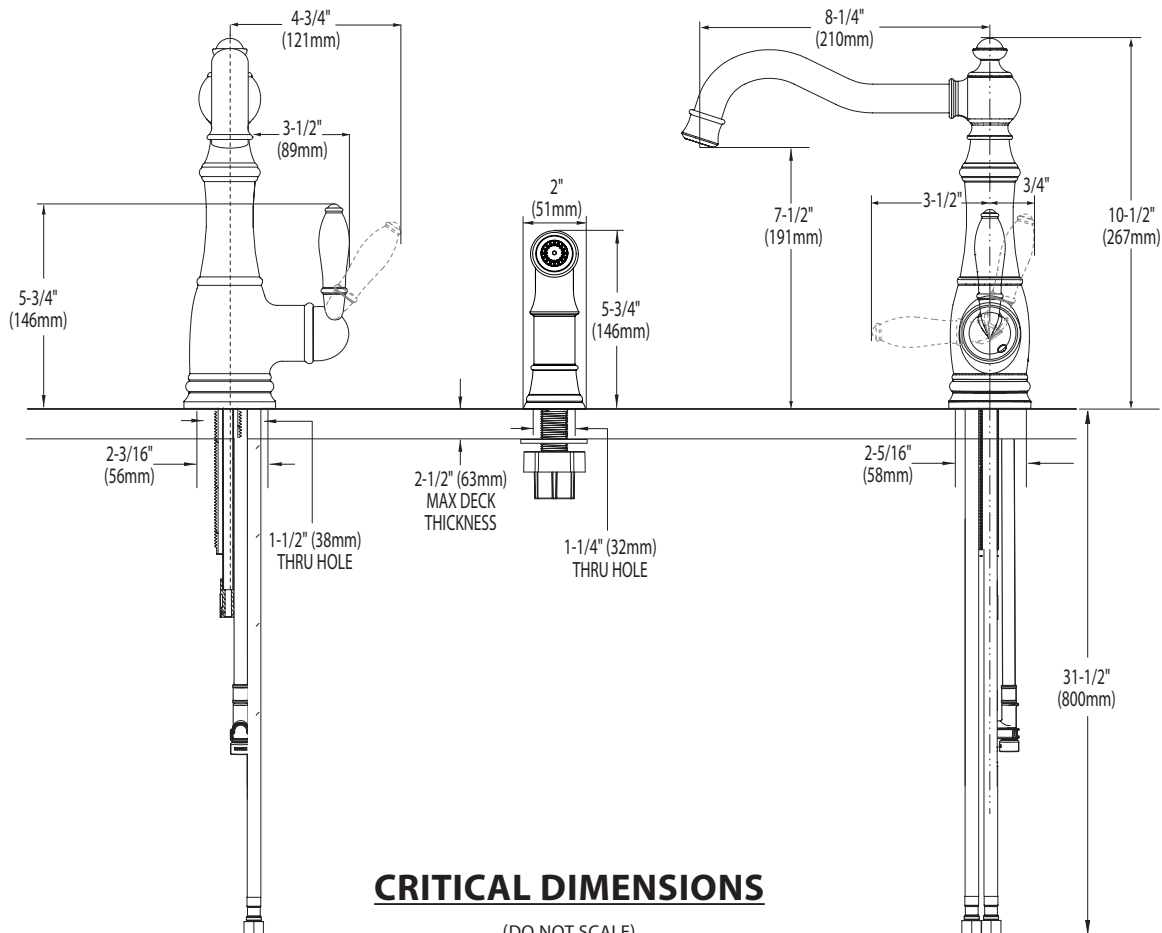

TO ORDER PARTS CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)