


Features:

- Forged Brass Construction
- Adjustable Hot Limit Safety Stop with Push-In Override
- Flow capacity / Diverter - 4.5 GPM / 45 psi
- Certified to meet or exceed the following codes and standards:  
ASME A112.18.1/CSAB 125.1-2012

## Portofino


### E-Mini Therm Valve Remote Thermostatic Valve with Two-Way Diverter

Rough-In Leftside Cutaway View

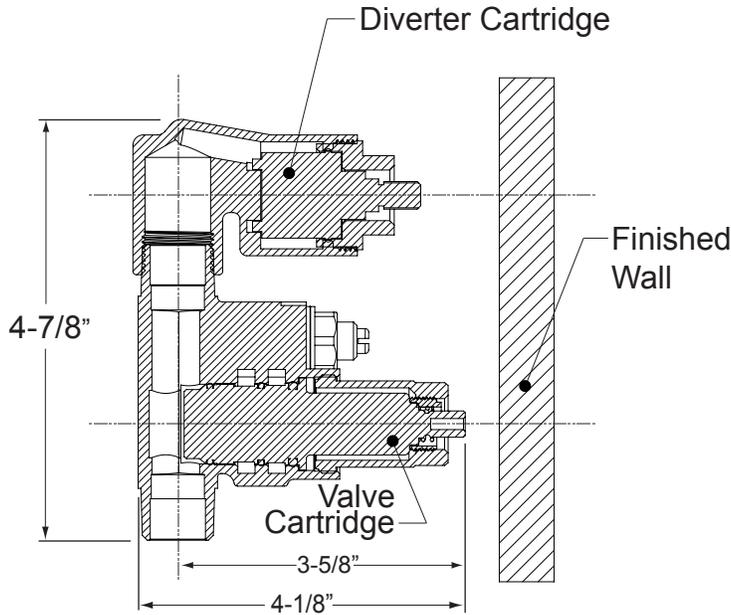

\*NOTE: Stem and All-Thread Tube will be sent with Handle Trim.


Rectangle Faceplate Leftside View

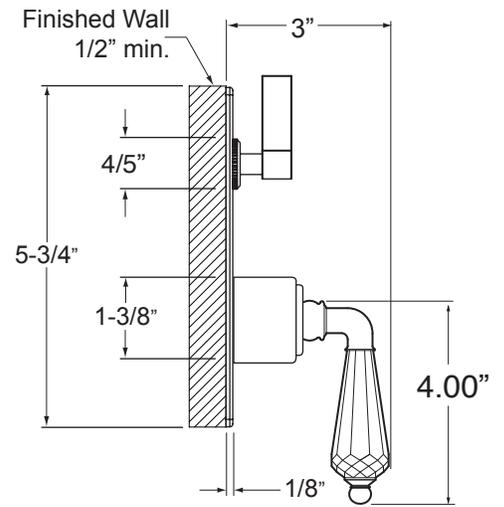

**1.0S6351T**  
5-3/4" x 3-3/4"


NOTE: MUST purchase Showerhead, Arm, Flange, and other options separately.

Rough-In Top View

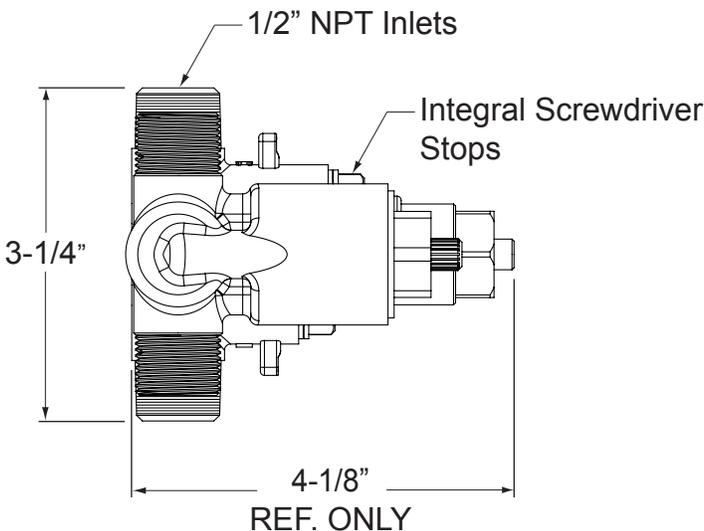

\*NOTE: Stem and All-Thread Tube will be sent with Handle Trim.

Round Faceplate Leftside View

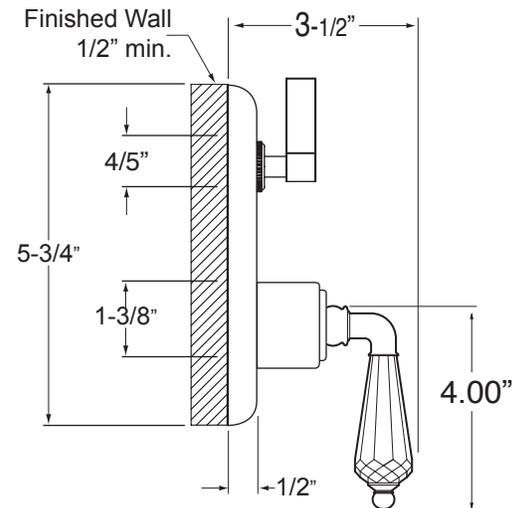

**1.0R6351T**  
5-3/4" round

NOTE: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.