

**FEATURES:**




- All brass construction. Flexible hoses designed to be installed on 8" to 16" centers. Includes soft touch drain assembly with overflow.
- Lever style handles with setscrew attachment.
- 1/4- turn ceramic disc valve cartridge.
- Available in all finishes. Warranty varies according to finish selection.
- Standard aerator is limited to 1.5 gpm.
- Certified to meet or exceed the following codes and standards:  
ASME A112.18.1/CSAB 125.1-2011

## Series 1900

1.196008

Harlow

## Widespread Lavatory Set

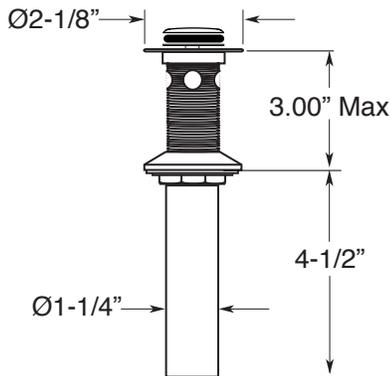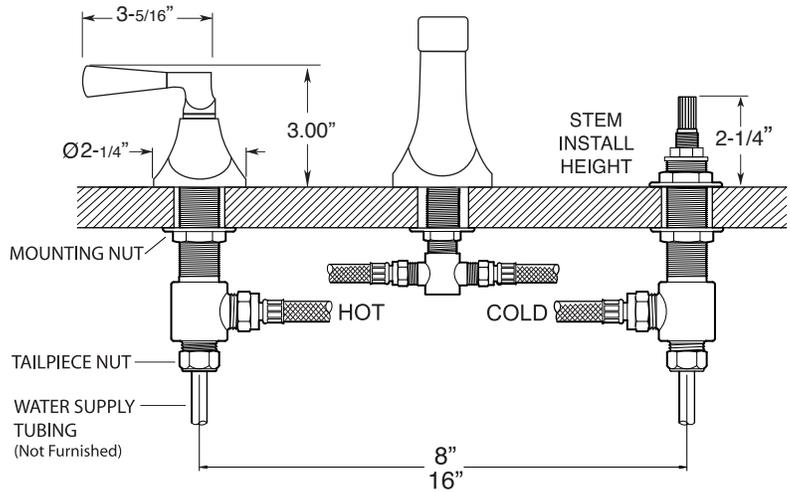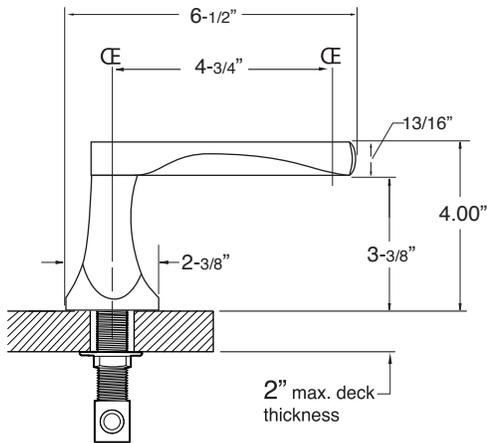

SOFT TOUCH  
DRAIN ASSEMBLY  
P/N: 18.11.052

NOTE: Spout and valves install through 1-1/4" diameter holes

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.