



1-7470-X Water Dance® Two Wall Shower System

Water Dance System includes High-Flo™ Pressure-Balancing shower valve with integral stops, metal finish insert lever handle and adjustable stop screw to limit handle turn. Triple outlet index lever diverter allows up to two functions to flow simultaneously. Euro-Flo three mode shower head with arm and flange. Four Euro-Flo adjustable body sprays. Euro-Flo three mode wall/hand shower with flexible metal hose, in-line vacuum breaker, wall connection and flange. 24" slide bar for hand shower mounting.

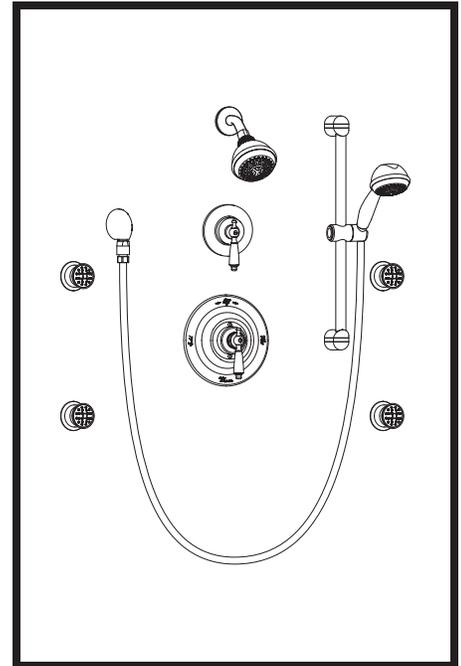

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

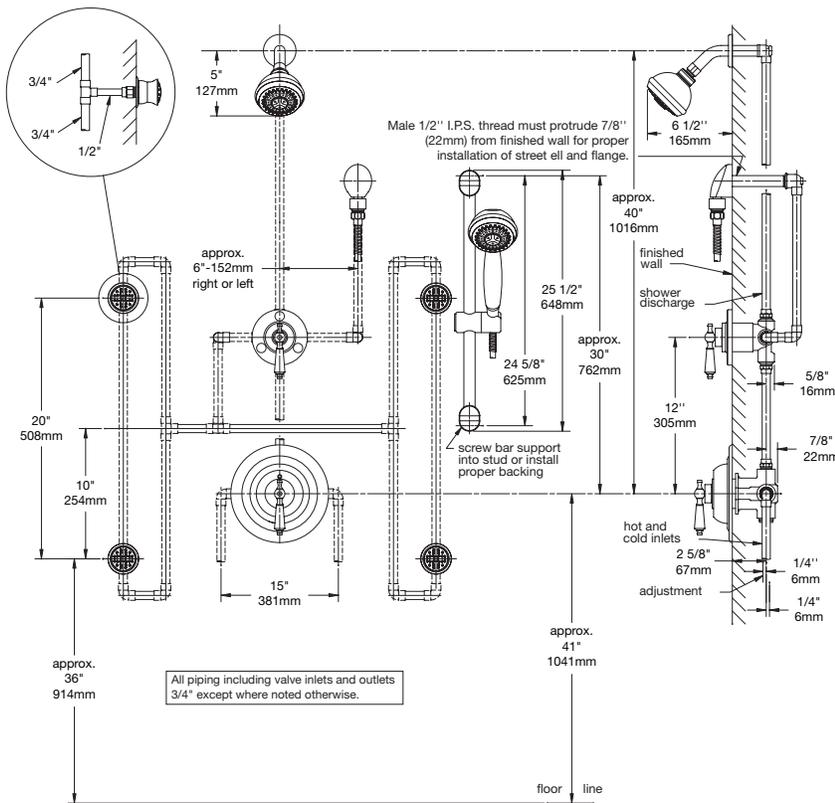

Job/Location

.....

.....

Engineer

.....

.....

Contractor

.....

.....

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 050108

SYMMONS®
the smart choice™