Location:




35EX-RD1 Exposed Shower Riser **Specification Submittal** 



Feature Highlights	Model Numbers
<ul> <li>1 mode hand shower</li> <li>1 mode showerhead</li> <li>60" flexible metal hose</li> </ul>	☐ 35EX-RD1 Exposed Shower Riser with Hand Shower and Showerhead
<ul> <li>Diverter included for toggling between hand shower and showerhead</li> </ul>	Compliance
<ul> <li>Includes column/slide bar and hand shower bracket</li> <li>2.5 gpm (9.5 L/min) standard flow restrictor</li> <li>Components shall be metal and nonmetallic construction, plated in standard polished chrome finish</li> </ul>	- ASME A112.18.1/CSA B125.1
Options/Modifications	Warranty
☐ -1.5 CG 1.5 gpm (5.7 L/min) flow restrictor	Limited Lifetime - to the original end purchaser in
Satin Nickel finish	consumer/residential installations. <b>5 Years</b> - for industrial/commercial installations.
Note: Append appropriate -suffix to model number.	Refer to www.symmons.com/warranty for complete warranty information.

## **Dimensions**

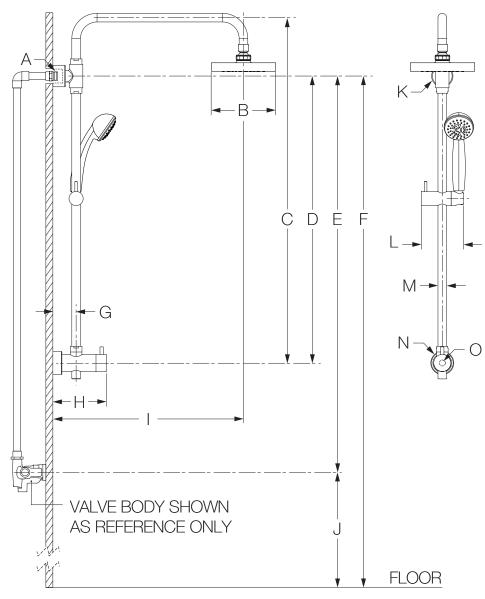

**Note:** Dimensions subject to change without notice.



## **Important Notes:**

If the distance for item E is less than
 (737 mm), Exposed Shower Riser is not appropriate for your application.
 Hand shower wands that exceed
 lbs. are not recommended for Exposed Shower Riser.

Measurements	
	Male 1/2" NPT thread must
A	protrude 1/2" (13 mm)
	from finished wall
В	Ø 6", 152 mm
C	27-1/2", 699 mm
D	22", 559 mm
	For Shower Systems:
	Min. 29", 737 mm
	from centerline of shower
E	output to valve
-	For Tub/Shower Systems:
	Min. 29", 737 mm
	from centerline of shower
	output to valve
F	Ref. 77", 1956 mm
G	2-3/16", 55 mm
H	5-1/16", 128 mm
	17-15/16", 456 mm
J	For Shower Systems:
	Min. 42", 1067 mm
	Max. 48", 1219 mm
	For Tub/Shower Systems:
	Ref. 32", 813 mm
K	Ø 2", 51 mm
L	4", 102 mm
M	Ø 13/16", 21 mm
N	Ø 2-3/16", 56 mm
0	Hole Size
	Ø 5/16", 8 mm