



# SYMMONS® Ultra-Sense®

the smart choice™


## Symmons Ultra-Sense® S-6080 Series

It makes sense to select the sensor faucet with technology that's more advanced and more reliable than any faucet you've seen before. Symmons Ultra-Sense® S-6080 Series uses our unique Position Sensitive Detection (PSD) technology to create a faucet that just makes better sense - and provides the features you're looking for:

- PSD sensors are unaffected by inconsistent lighting environments, varying surface colors or textures and splashes - resulting in the most reliable performance available.
- Can be installed for pre-set or user-adjustable temperatures offering flexibility for your specific application.
- 1.5 gpm vandal resistant aerator conserves water and energy. (.5 gpm available).
- Solid brass housing and base plate minimizes vandalism and provides years of trouble-free performance.
- Battery-powered model features energy-efficient, long-life 6V lithium battery. (lasts approximately 3 years at 210 cycles per day)
- Watertight seals protect the sensors and internal electronics while providing convenient, above-the-counter access.
- Handle limit stop provides additional safety in public restrooms.
- Transformer power options available for single plug-in or gang installations.
- Installation options include 4" and 8" center set or single hole mounting.



Symmons Ultra-Sense®  
lavatory faucets are  
available in this finish:




Polished  
Chrome

Sensor Faucets with Position-Sensitive Detection

Faucet can be installed in one of three possible supply configurations:

- ① Hot and cold supply with lever handle temperature adjustment (factory standard)
- ② Hot and cold supply with pre-set tempered water (field adjusted)
- ③ Single supply for cold or pre-mixed tempered water (field adjusted)

**Modifications:** Suffix DP: 8" adapter plate • Suffix OFG: Offset grid strainer drain assembly in place of standard grid drain • Suffix NA: Non-aerating laminar flow spray outlet (1.5gpm, 5.7 L/min) • Suffix SM: Single hole mounting • Suffix LST: 18" long copper supply tubes • Suffix BRS: Radiance® polished brass finish

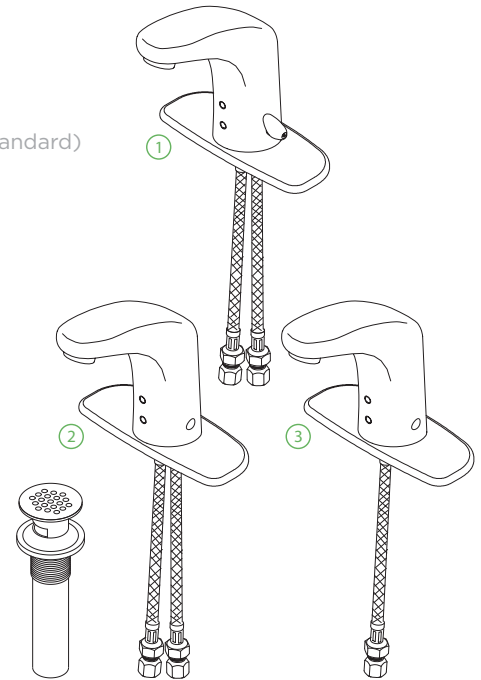

## Symmons Ultra-Sense® S-6080 Series Battery-Powered Faucets with PSD



**S-6080-G** with grid drain assembly

**S-6080** faucet only

Ultra-Sense battery-powered, sensor-activated lavatory faucet with infrared Position Sensitive Detection (PSD) system. Faucet features 4" center deck plate and temperature limit stop to adjust outlet temperature, 1.5 gpm (5.7 L/min) low profile, vandal-resistant aerator, 10 second factory-set cycle time with automatic shut-off feature, 6-volt lithium battery power pack, in-line check/strainers. Electronic components and battery are sealed and housed above deck in a cast brass body for maximum vandal resistance.

Every S-6080 faucet comes equipped to be installed in one of three possible supply configurations, providing optimum flexibility for new construction as well as remodel or renovation projects.